



Technical Datasheet

EL-K80S Contact Cleaner with lubrication

Description

EL-K80s is ideal for cleaning and degreasing of all forms of electronic and electrical equipment, such as computer and printer parts, typewriters, video and recording equipment, delicate switch gear, televisions and signalling mechanisms, flushing away all unwanted residues.

EL-K80s leaves a light oil film on the components which help to protect them against moisture contamination.


The product safely cleans delicate plastics and elastomers and it will not affect printed circuit boards. EL-K80s will not cause any changes in the frequency or the capacity of electrical equipment.

EL-K80S is based on extremely pure and chemically stable compounds. EL-K80S leaves a light lubricating oil film.

Observe: For safety reasons when using EL-K80s, all electric motors and power switches should be turned off and warm or hot components should be allowed to cool prior to use. The power should not be turned on until the product is completely evaporated (about 15 minutes), this process can be speeded up by warm air.

Properties

- especially for mechanical/electronic components
- delicate plastics or elastomers will not be affected
- gentle cleaner
- lubricates and protects

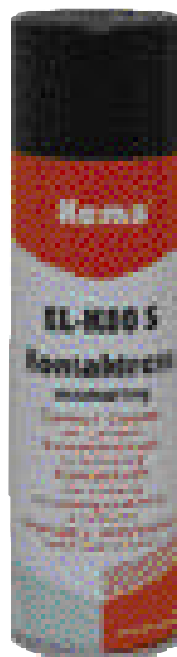

ITW Chemical Products Scandinavia

Priorsvej 36 • DK-8600 Silkeborg • Phone: +45 86 82 64 44 • Fax: +45 86 82 64 64 • e-mail: info@itw-scan.dk • www.itw-scan.dk

Important note: All information and technical data are based on tests which to our knowledge are correct and reliable. However, there are no guarantees. It is the responsibility of the user to make sure that the information is useable and complete in connection with the purpose in question.

Date: 15.01.2004

INFORMATION

EL-K80S Contact Cleaner with Lubrication

Technical and physical data

Partnumber	11532	11535
Packing	200 ml spray	500 ml spray
Contents	160 ml	400 ml
Weight	118 g	290 g
Propellant	CO ₂	
Colour	transparent	
Base	alcohols/hydrocarbons	
Flashpoint (konc)	<14°C	
Density at 20°C	0,673 g/cm ³	
Content of solid-state component	special oil	
Product Registration no.	1184068	
Emptying rate	1,4 g/sec	

Information

For more technical information and Material Safety Datasheets for the products at ITW, please contact:

ITW Chemical Products Scandinavia

*Priorsvej 36
Dk-8600 Silkeborg
Phone: +45 86 82 64 44
Fax: +45 86 82 64 64
e-mail: info@itw-scan.dk
www.itw-scan.dk*